




*Fasteners fasten you and me.*

**Product Dimensions, Standards and Weights**

**DIN 982 / ISO 7040 Technical Specifications**

## Metric DIN 982 Nylon Insert Hexagon Stop Lock Nuts High Type

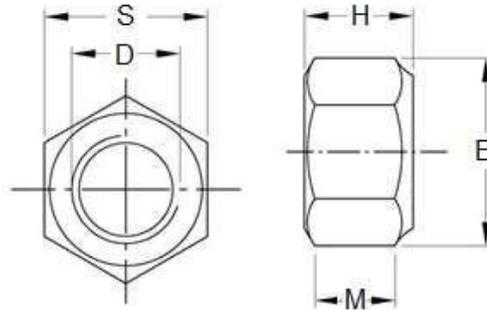

### Dimensions of Metric DIN 982 Nylon Insert Hexagon Stop Lock Nuts High Type

D	S	E	H	M	WEIGHT KG/1000pcs
M4	7	7.66	6	2.9	1.1
M5	8	8.79	6.3	4.4	1.4
M6	10	11.05	8	4.9	2.5
M8	13	14.38	9.5	6.44	5.6
M10	17	18.9	11.5	8.04	11.7
M12	19	21.1	14	10.37	16.6
M14	22	23.9	16	12.1	21
M16	24	26.76	18	14.1	34.8
M20	30	32.95	22	16.9	65
M24	36	39.55	28	20.2	127

Metric DIN 982 nylon insert lock nuts are prevailing torque type lock nuts which have a permanent undersized non metallic insert (nylon/polyamide) that produces friction between threads of mated components thereby increasing the resistance to loosening forces. DIN 982 is similar in dimensions to DIN 985 except that the total height of DIN 982 nuts is greater. Nylon insert lock nuts may be re-used a limited number of times because the threads of the mating bolt deform but do not cut into the polymer insert. These nuts are considered one-way lock nuts because they can only be installed one-way—top up. The nylon insert limits the use at elevated temperatures or when exposed to certain chemicals.



*Fasteners fasten you and me.*

DIN (**D**eutsches **I**nstitut für **N**ormung - German Institute for Standardization) standards are issued for a variety of components including industrial fasteners as Metric DIN 939 double end studs. The DIN standards remain common in Germany, Europe and globally even though the transition to ISO standards is taking place. DIN standards continue to be used for parts which do not have ISO equivalents or for which there is no need for standardization. In this case the ISO equivalent for a DIN 982 is ISO 7040.

**1) Mechanical properties of stainless steel for metric DIN 982 Nylon Insert Hexagon Stop Lock Nuts High Type**

Stainless steels can be divided into three groups of steel - austenitic, ferritic and martensitic. Austenitic steel is by far the most common type (>90% of commercial fasteners). The steel groups and strength classes are designated by a four-digit sequence of letters and numbers (eg A2-70) as shown in the following table. DIN EN ISO 3506 governs screws and nuts made from stainless steel.

Steel group	Steel grade	Strength class	Screws, Nuts and Bolts			
			Tensile strength N/mm <sup>2</sup>	Tensile strength PSI	Dia range	Nut Load N/mm <sup>2</sup>
Austenitic	A2 and A4	50	500	70,000	<=M39	500
		70	700	100,000	<=M20	700
		80	800	118,000	<=M20	800

The tensile stress is calculated with reference to the tensile stress area (see DIN EN ISO 3506-1979). Nuts to be paired with same grade of stainless steel screws

Steel group	Property Strength class	Made From	Characteristics
Austenitic	50	A1, A2	Soft; cold worked, turned and soft pressed fasteners
	70	A2, A4	Cold worked, normal strength formed fasteners
	80	A2, A4	Extreme cold worked, high strength, special applications

Handan Qijing Fastener Manufacture Co.,Ltd.  
 TELE: 0086-310-6811600    Whatsapp:+86 18831027810  
 Website: <https://qijing.en.made-in-china.com/>

ADD:Yongnian District, Handan City, Hebei Province, China.  
<https://www.qj-fastener.com/>



*Fasteners fasten you and me.*

**2) Chemical composition of stainless steel metric DIN 982 Nylon Insert Hexagon Stop Lock Nuts High Type**

Grade	USA Grade	Material designation	Material no.	C %	Si ≤ %	Mn ≤ %	Cr %	Mo %	Ni %
A 2	304	X 5Cr Ni 1810	1.4301	≤ 0.07	1.0	2.0	17.5 to 19.5	-	8.0 to 10.5
		X 2 Cr Ni 1811	1.4306	≤ 0.03	1.0	2.0	18.0 to 20.0	-	10 to 12.0
		X 8 Cr Ni 19/10	1.4303	≤ 0.07	1.0	2.0	17.0 to 19.0	-	11.0 to 13.0
A 4	316	X 5 Cr Ni Mo 1712	1.4401	≤ 0.07	1.0	2.0	16.5 to 18.5	2.0 to 2.5	10.0 to 13.0
		X 2 Cr Ni Mo 1712	1.4404	≤ 0.03	1.0	2.0	16.5 to 18.5	2.0 to 2.5	10 to 13

**3) Chemical composition of steel metric DIN 982 Nylon Insert Hexagon Stop Lock Nuts High Type**

PROPERTY CLASS	MATERIAL AND TREATMENT	CHEMICAL COMPOSITION LIMITS %				TEMPERING TEMP °C MIN.
		C		P	S	
		min.	max.	max.	max.	
4.6, 4.8, 5.8, 6.8	Low or medium carbon steel	-	0.55	0.05	0.06	-
8.8	Medium carbon steel quenched, tempered	0.25	0.55	0.04	0.05	425
9.8	Medium carbon steel quenched, tempered	0.25	0.55	0.04	0.05	425
10.9	Medium carbon steel additives e.g. boron, Mn, Cr or Alloy steel - quenched, tempered	0.20	0.55	0.04	0.05	425
12.9	Alloy steel - quenched, tempered	0.20	0.50	0.035	0.035	380

Handan Qijing Fastener Manufacture Co.,Ltd.  
 TELE: 0086-310-6811600    Whatsapp:+86 18831027810  
 Website: <https://qijing.en.made-in-china.com/>

ADD:Yongnian District, Handan City, Hebei Province, China.  
<https://www.qj-fastener.com/>



*Fasteners fasten you and me.*

#### 4) Mechanical properties of steel for metric DIN 982 Nylon Insert Hexagon Stop Lock Nuts High Type

MECHANICAL PROPERTY		PROPERTY CLASS								
		4.8	5.6	5.8	6.8	8.8		9.8	10.9	12.9
						Up to M 16	Over M 16			
Tensile Strength (Rm, N/mm <sup>2</sup> )	nom.	400	500		600	800		900	1000	1200
	min.	420	500	520	600	800	830	900	1040	1220
Vickers Hardness	min.	130	155	160	190	250	255	290	320	385
	max	250				320	336	360	380	435
Brinell Hardness	min.	124	147	152	181	319	242	266	295	353
	max.	238				385	319	342	363	412
Rockwell Hardness	min. HR	71	79	82	89	-				
	HRC	-	-	-	-	20	23	28	32	39
	HR	95				99	-			
	max. HRC	-	-	-	-	32	34	37	39	44
Yield Stress ReL. N/mm <sup>2</sup>	nom.	320	300	400	480	-				
	min.	340	300	420	480	-				
Stress at permanent set limit N/mm <sup>2</sup>	nom.	-				640		720	900	1080
	min.	-				640	660	720	940	1100

#### Disclaimer

Dimensional data and technical information for Metric DIN 982 Nylon Insert Hexagon Stop Lock Nuts High Type was obtained from publicly available sources and not acquired through standards agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. QJ Fasteners makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standards authorities for accurate and detailed information.